

# **UNIVERSAL MOUNTING PLATE**

UH4061/UH4062 INSTALLATION INSTRUCTIONS


moun

Remove door closer to be replaced. Determine door handing and installation type. Align holes in the mounting plate with the existing mounting holes in the door or the jamb (for Top Jamb installations).


#### Notes:

- When installing mounting plate, make sure you can see the FRONT of the plate with properly marked handing and that the HINGE side of plate matches illustrations shown. Plate is marked with a sticker that designates the front and hinge side.
- The mounting plate will have to be flipped when used in a parallel arm installation so the hinge sticker is facing opposite side of illustration. Flip plate from left to right or right to left. DO NOT FLIP PLATE FROM TOP TO BOTTOM.

### **Regular Arm Installation**




Left Hand Door - LH Right Hand Reverse - RHR




Right Hand Door - RH Left Hand Reverse - LHR

#### **Top Jamb Installation**




Left Hand Door - LH Right Hand Reverse - RHR




Right Hand Door - RH Left Hand Reverse - LHR

### **Parallel Arm Installation**



Left Hand Door - LH Right Hand Reverse - RHR

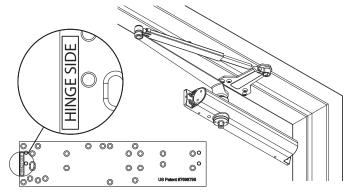

Right Hand Door - RH Left Hand Reverse - LHR



## UNIVERSAL MOUNTING PLATE

UH4061/UH4062 INSTALLATION INSTRUCTIONS

Attach mounting plate to the door or jamb by either using the fasteners from the closer being replaced or the fasteners supplied with the UH4061/UH4062 door closer. For the supplied fasteners, use the "Preparation for Fasteners" chart on Page 2 of the closer instructions to identify the fasteners to be used.


Install UH4061/UH4062 door closer on the mounting plate with four 1/4"-20 x 7/16" oval head machine screws and install arm onto closer. Refer to "Main Arm Installation" (Pages 3-5; dependent on installation type) for correct arm preload.

#### Notes:

 When installing forearm shoe or parallel arm bracket reuse existing holes if possible.

 If existing forearm shoe holes or existing parallel arm holes cannot be used, redrill new holes in door or frame; following "Door Closer Installation Instructions" (Pages 3-5; dependent on installation type).

To adjust closer refer to "Door Closer Installation Instructions" provided (Page 6).

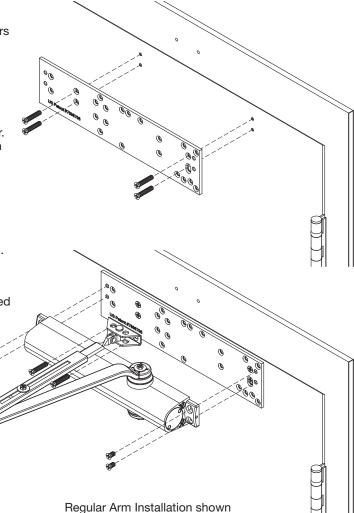

FOR CUSTOMER CARE CALL TOLL FREE 800-562-5625 OR info@hamptonproducts.com



50 Icon, Foothill Ranch, CA 92610-3000 USA www.hamptonproducts.com ● 1-800-562-5625 ©2019 Hampton Products International Corp. 999-30014 REVA\_Eng 08/19