


- 1 Remove door closer to be replaced. Determine door handing and installation type. Align holes in the mounting plate with the existing mounting holes in the door or the jamb (for Top Jamb installations).


Notes:

- When installing mounting plate, make sure you can see the FRONT of the plate with properly marked handing and that the HINGE side of plate matches illustrations shown. Plate is marked with a sticker that designates the front and hinge side.
- The mounting plate will have to be flipped when used in a parallel arm installation so the hinge sticker is facing opposite side of illustration. Flip plate from left to right or right to left. DO NOT FLIP PLATE FROM TOP TO BOTTOM.

Regular Arm Installation

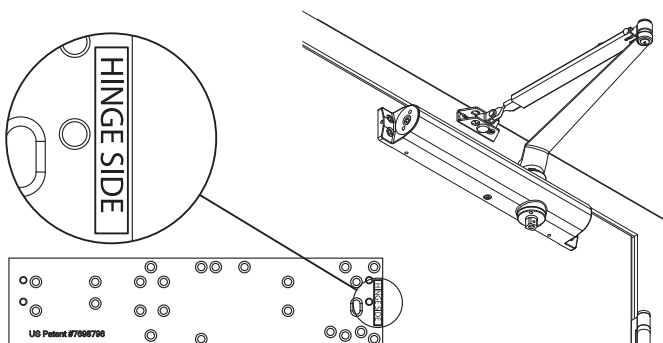


Left Hand Door - LH
Right Hand Reverse - RHR

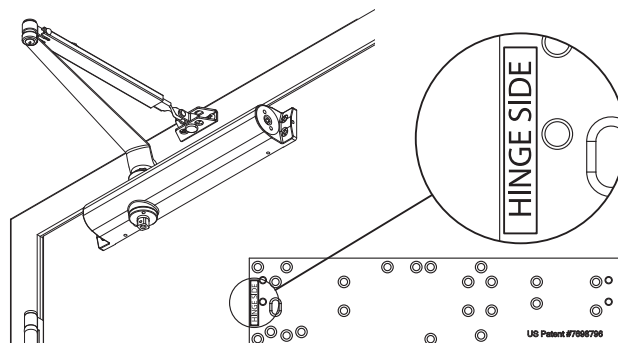


Right Hand Door - RH
Left Hand Reverse - LHR

Top Jamb Installation

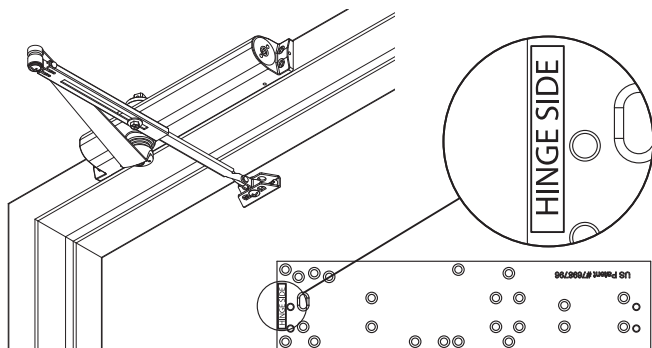


Left Hand Door - LH
Right Hand Reverse - RHR

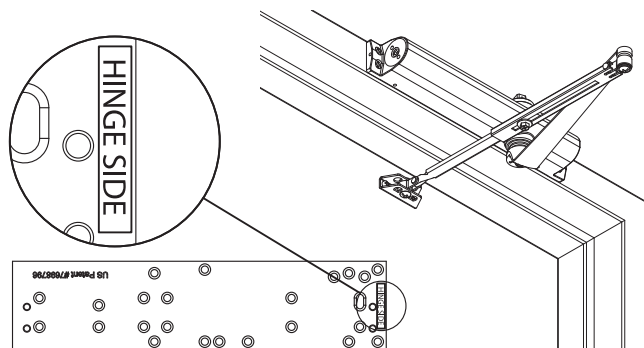


Right Hand Door - RH
Left Hand Reverse - LHR

Parallel Arm Installation

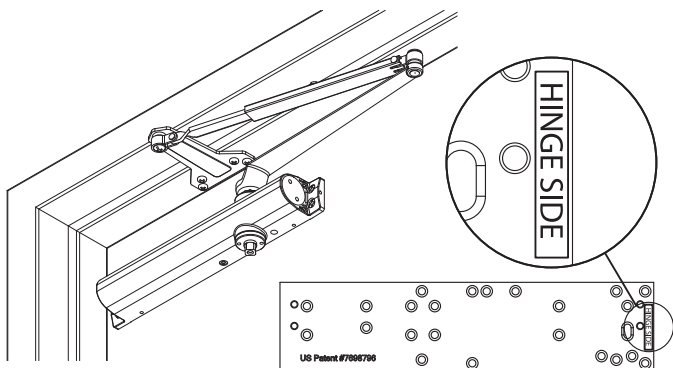

Left Hand Door - LH
Right Hand Reverse - RHR

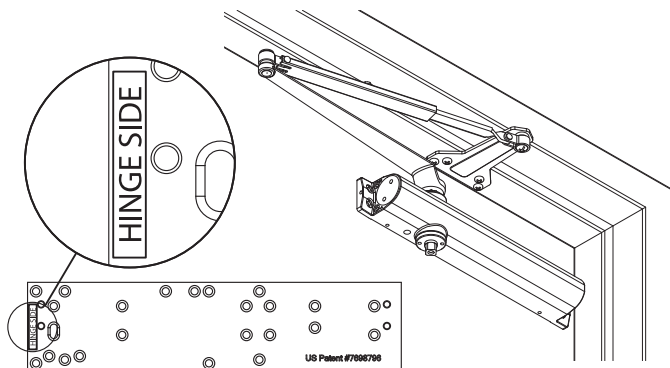

Right Hand Door - RH
Left Hand Reverse - LHR

BRINKS COMMERCIAL MOUNTING PLATE**BC4061/BC4062 INSTALLATION INSTRUCTIONS**



- 2** Attach mounting plate to the door or jamb by either using the fasteners from the closer being replaced or the fasteners supplied with the BC4061/BC4062 door closer. For the supplied fasteners, use the "Preparation for Fasteners" chart on Page 2 of the closer instructions to identify the fasteners to be used.

- 3** Install BC4061/BC4062 door closer on the mounting plate with four 1/4"-20 x 7/16" oval head machine screws and install arm onto closer. Refer to "Main Arm Installation" (Pages 3-5; dependent on installation type) for correct arm preload.

Notes:

- When installing forearm shoe or parallel arm bracket reuse existing holes if possible.
- If existing forearm shoe holes or existing parallel arm holes cannot be used, redrill new holes in door or frame; following "Door Closer Installation Instructions" (Pages 3-5; dependent on installation type).

- 4** To adjust closer refer to "Door Closer Installation Instructions" provided (Page 6).

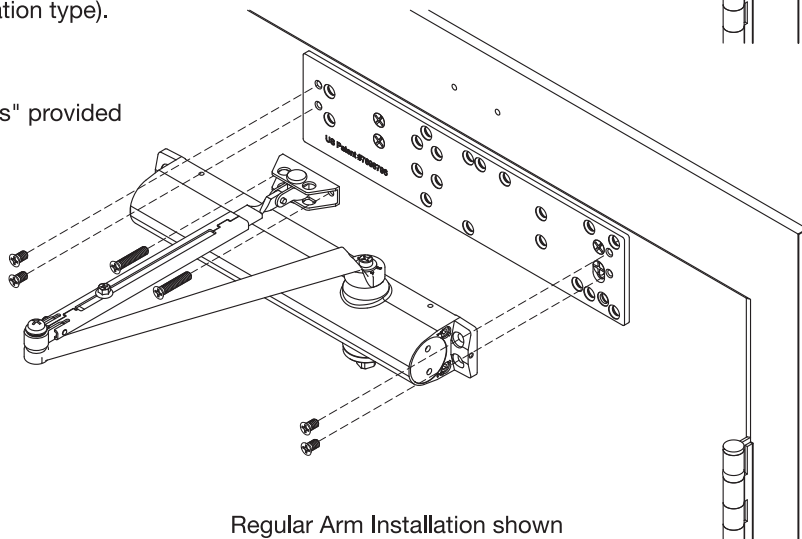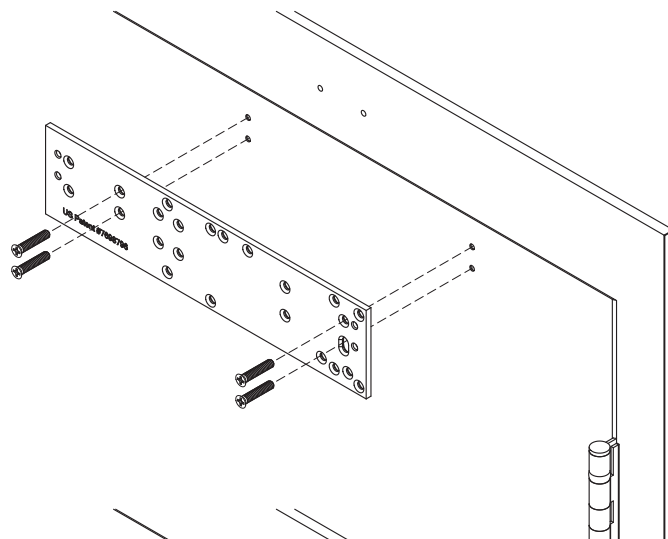

Regular Arm Installation shown

FOR CUSTOMER CARE CALL TOLL FREE
800-562-5625 OR info@hamptonproducts.com



50 Icon, Foothill Ranch, CA 92610-3000 USA
www.hamptonproducts.com • 1-800-562-5625
©2020 Hampton Products International Corp.
999-30009_REVA_Eng 02/20